


FLANGES

**ASME B16.47 CLASS 600
SERIES B WELDING NECK
FLANGES**

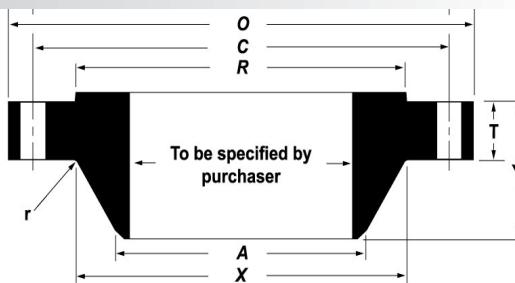

Nominal Pipe Size	Outside Diameter (O)	Minimum Thickness (T)	Raised Face Diameter (R)	Length Thru Hub (Y)	Hub Diameter (X)	Minimum Fillet Radius (r)	Top of Hub (A)	Bore (B)	Approximate Weight (lbs)	Bolt Circle (C)	Number of Holes	Diameter of Holes
inch	inch	inch	inch	inch	inch	inch	inch	inch	lbs	inch	count	inch
26"	35.00"	4.38"	28.62"	7.12"	27.50"	0.50"	26.00"	Specified by Purchaser	550	31.75"	28	1.75"
28"	37.50"	4.56"	30.88"	7.50"	29.62"	0.50"	28.00"		650	34.00"	28	1.88"
30"	40.25"	4.94"	33.12"	8.06"	31.75"	0.50"	30.00"		810	36.50"	28	2.00"
32"	42.75"	5.12"	35.25"	8.50"	33.88"	0.50"	32.00"		950	38.75"	28	2.12"
34"	45.75"	5.56"	37.50"	9.19"	36.00"	0.56"	34.00"		1205	41.50"	24	2.38"
36"	47.75"	5.75"	39.75"	9.56"	38.12"	0.56"	36.00"		1340	43.50"	28	2.38"

All dimensions are in inches.


1/4" raised face will be added to the thickness and overall length unless otherwise specified.

38" thru 60" sizes are the same as Series "A".

Flat face option available.

FLANGES

**ASME B16.47 CLASS 600
SERIES B BLIND FLANGES**

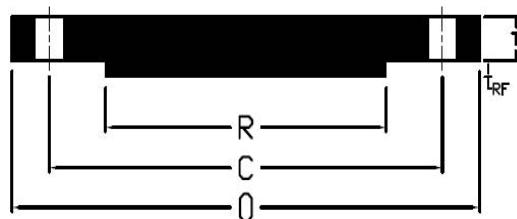

Nominal Pipe Size	Outside Diameter (O)	Minimun Thickness (T)	Raised Face Diameter (R)	Approximate Weight (lbs)	Bolt Circle (C)	Number of Holes	Diameter of Holes
inch	inch	inch	inch	lbs	inch	count	inch
26"	35.00"	4.38"	28.62"	1195	31.75"	28	1.75"
28"	37.50"	4.56"	30.88"	1427	34.00"	28	1.88"
30"	40.25"	5.00"	33.12"	1800	36.50"	28	2.00"
32"	42.75"	5.31"	35.25"	2160	38.75"	28	2.12"
34"	45.75"	5.68"	37.50"	2645	41.50"	24	2.38"
36"	47.75"	5.94"	39.75"	3013	43.50"	28	2.38"

All dimensions are in inches.

1/4" raised face will be added to the thickness unless otherwise specified.

38" thru 60" sizes are the same as Series "A".

Flat face option available.