


FLANGES

INDUSTRY STANDARD
CLASS 150 SLIP-ON WITH
SERIES A BOLTING
PATTERN

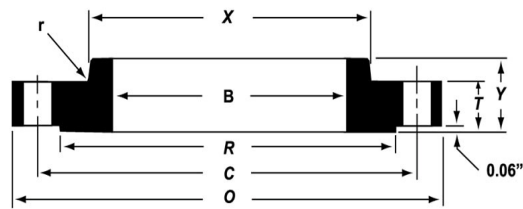

All dimensions are in inches.

These flanges will be supplied with a 1/16" raised face unless otherwise specified.

Flat face option available


Dimensions are supportive from industry terminology and are a non-committee specification.

These flanges are not covered by ASME B16.47 or API-605 specifications.

Nominal Pipe Size	Outside Diameter (O)	Thickness (T)	Raised Face Diameter (R)	Length Thru Hub (Y)	Hub Diameter (X)	Minimum Fillet Radius (r)	Flange Bore (B)	Approximate Weight (lbs)	Bolt Circle (C)	Number of Holes	Diameter of Holes
inch	inch	inch	inch	inch	inch	inch	inch	lbs	inch	count	inch
26"	34.25"	2.69"	29.50"	3.69"	28.25"	0.38"	26.25"	289	31.75"	24	1.38"
28"	36.50"	3.06"	31.50"	3.81"	30.50"	0.44"	28.25"	352	34.00"	28	1.38"
30"	38.75"	3.31"	33.75"	3.94"	32.50"	0.44"	30.25"	416	36.00"	28	1.38"
32"	41.75"	3.41"	36.00"	4.18"	34.50"	0.44"	32.25"	506	38.50"	28	1.62"
34"	43.75"	3.68"	38.00"	4.25"	36.50"	0.50"	34.25"	561	40.50"	32	1.62"
36"	46.00"	3.96"	40.25"	4.56"	38.75"	0.50"	36.25"	661	42.75"	32	1.62"
38"	48.75"	4.06"	42.25"	4.56"	41.25"	0.50"	38.25"	780	45.25"	32	1.62"
40"	50.75"	4.18"	44.25"	4.81"	43.25"	0.50"	40.25"	840	47.25"	36	1.62"
42"	53.00"	4.43"	47.00"	5.06"	45.50"	0.50"	42.25"	961	49.50"	36	1.62"
44"	55.25"	4.68"	49.00"	5.18"	47.75"	0.50"	44.25"	1071	51.75"	40	1.62"
46"	57.25"	4.86"	51.00"	5.31"	49.75"	0.50"	46.25"	1156	53.75"	40	1.62"
48"	59.50"	5.06"	53.50"	5.56"	52.00"	0.50"	48.25"	1282	56.00"	44	1.62"

FLANGES

INDUSTRY STANDARD
CLASS 150 SLIP-ON WITH
SERIES B BOLTING
PATTERN

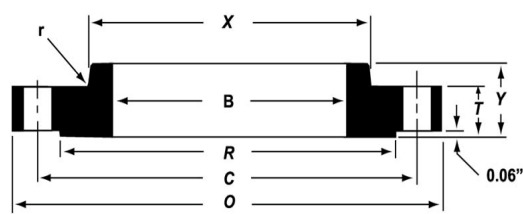

All dimensions are in inches.

These flanges will be supplied with a 1/16" raised face unless otherwise specified.

Flat face option available

Dimensions are supportive from industry terminology and are a non-committee specification.

These flanges are not covered by ASME B16.47 or API-605 specifications.

Nominal Pipe Size	Outside Diameter (O)	Thickness (T)	Raised Face Diameter (R)	Length Thru Hub (Y)	Hub Diameter (X)	Minimum Fillet Radius (r)	Flange Bore (B)	Approximate Weight (lbs)	Bolt Circle (C)	Number of Holes	Diameter of Holes
inch	inch	inch	inch	inch	inch	inch	inch	lbs	inch	count	inch
26"	30.94"	1.62"	28.00"	2.62"	26.94"	0.38"	26.25"	85	29.31"	36	0.88"
28"	32.94"	1.75"	30.00"	2.75"	28.94"	0.38"	28.25"	97	31.31"	40	0.88"
30"	34.94"	1.75"	32.00"	2.75"	31.00"	0.38"	30.25"	103	33.31"	44	0.88"
32"	37.06"	1.81"	34.00"	2.81"	33.06"	0.38"	32.25"	125	35.44"	48	0.88"
34"	39.56"	1.94"	36.25"	2.94"	35.12"	0.38"	34.25"	165	37.69"	40	1.00"
36"	41.62"	2.06"	38.25"	3.06"	37.19"	0.38"	36.25"	186	39.75"	44	1.00"
38"	44.25"	2.12"	40.25"	3.12"	39.25"	0.38"	38.25"	227	42.12"	40	1.12"
40"	46.25"	2.19"	42.50"	3.19"	41.31"	0.38"	40.25"	245	44.12"	44	1.12"
42"	48.25"	2.31"	44.50"	3.31"	43.38"	0.44"	42.25"	269	46.12"	48	1.12"
44"	50.25"	2.38"	46.50"	3.38"	45.38"	0.44"	44.25"	288	48.12"	52	1.12"
46"	52.81"	2.44"	48.62"	3.44"	47.44"	0.44"	46.25"	343	50.56"	40	1.25"
48"	54.81"	2.56"	50.75"	3.56"	49.50"	0.44"	48.25"	373	52.56"	44	1.25"
50"	56.81"	2.69"	52.75"	3.69"	51.50"	0.44"	50.25"	403	54.56"	48	1.25"
52"	58.81"	2.75"	54.75"	3.75"	53.56"	0.44"	52.25"	426	56.56"	52	1.25"
54"	61.00"	2.81"	56.75"	3.81"	55.62"	0.44"	54.25"	469	58.75"	56	1.25"
56"	63.00"	2.88"	58.75"	3.88"	57.69"	0.56"	56.25"	492	60.75"	60	1.25"
58"	65.94"	2.94"	60.75"	3.94"	59.69"	0.56"	58.25"	602	63.44"	48	1.38"
60"	67.94"	3.00"	63.00"	4.00"	61.81"	0.56"	60.25"	634	65.44"	52	1.38"