


FLANGES

ASME B16.47 CLASS 150 SERIES A WELDING NECK FLANGES

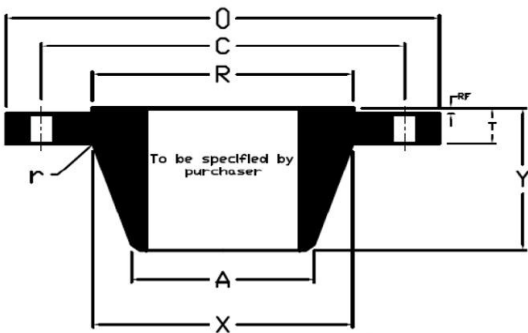

All ASME B16.47 CLASS 150# SERIES "A" weld neck flange dimensions are in inches.


These ASME B16.47 CLASS 150# SERIES "A" weld neck flanges will be supplied with a 1/16" raised face unless otherwise specified.

Flat face option available for ASME B16.47 CLASS 150# SERIES "A" weld neck flanges.

Nominal Pipe Size	Outside Diameter (O)	Minimum Thickness (T)	Raised Face Diameter (R)	Length Thru Hub (Y)	Hub Diameter (X)	Minimum Fillet Radius (r)	Top of Hub (A)	Bore (B)	Approximate Weight (lbs)	Bolt Circle (C)	Number of Holes	Diameter of Holes
inch	inch	inch	inch	inch	inch	inch	inch	inch	lbs	inch	count	inch
26"	34.25"	2.69"	29.50"	4.75"	26.62"	0.38"	26.00"	Specified by Purchaser	300	31.75"	24	1.38"
28"	36.50"	2.81"	31.50"	4.94"	28.62"	0.44"	28.00"		345	34.00"	28	1.38"
30"	38.75"	2.94"	33.75"	5.38"	30.75"	0.44"	30.00"		400	36.00"	28	1.38"
32"	41.75"	3.19"	36.00"	5.69"	32.75"	0.44"	32.00"		505	38.50"	28	1.62"
34"	43.75"	3.25"	38.00"	5.88"	34.75"	0.50"	34.00"		540	40.50"	32	1.62"
36"	46.00"	3.56"	40.25"	6.19"	36.75"	0.50"	36.00"		640	42.75"	32	1.62"
38"	48.75"	3.44"	42.25"	6.19"	39.00"	0.50"	38.00"		720	45.25"	32	1.62"
40"	50.75"	3.56"	44.25"	6.44"	41.00"	0.50"	40.00"		775	47.25"	36	1.62"
42"	53.00"	3.81"	47.00"	6.75"	43.00"	0.50"	42.00"		890	49.50"	36	1.62"
44"	55.25"	4.00"	49.00"	7.00"	45.00"	0.50"	44.00"		990	51.75"	40	1.62"
46"	57.25"	4.06"	51.00"	7.31"	47.12"	0.50"	46.00"		1060	53.75"	40	1.62"
48"	59.50"	4.25"	53.50"	7.56"	49.12"	0.50"	48.00"		1185	56.00"	44	1.62"
50"	61.75"	4.38"	55.50"	8.00"	51.25"	0.50"	50.00"		1270	58.25"	44	1.88"
52"	64.00"	4.56"	57.50"	8.25"	53.25"	0.50"	52.00"		1410	60.50"	44	1.88"
54"	66.25"	4.75"	59.50"	8.50"	55.25"	0.50"	54.00"		1585	62.75"	44	1.88"
56"	68.75"	4.88"	62.00"	9.00"	57.38"	0.50"	56.00"		1760	65.00"	48	1.88"
58"	71.00"	5.06"	64.00"	9.25"	59.38"	0.50"	58.00"		1915	67.25"	48	1.88"
60"	73.00"	5.19"	66.00"	9.44"	61.38"	0.50"	60.00"		2045	69.25"	52	1.88"

FLANGES

ASME B16.47 CLASS 150 SERIES A BLIND FLANGES

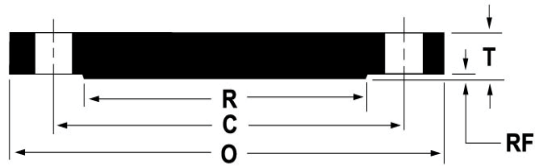

All ASME B16.47 150# SERIES "A" Blind flange dimensions are in inches.

These ASME B16.47 150# SERIES "A" Blind flanges will be supplied with a 1/16" raised face unless otherwise specified.

Flat face option available for ASME B16.47 150# SERIES "A" Blind flanges.

Nominal Pipe Size	Outside Diameter (O)	Minimum Thickness (T)	Raised Face Diameter (R)	Approximate Weight (lbs)	Bolt Circle (C)	Number of Holes	Diameter of Holes
inch	inch	inch	inch	lbs	inch	count	inch
26"	34.25"	2.69"	29.50"	702	31.75"	24	1.38"
28"	36.50"	2.81"	31.50"	833	34.00"	28	1.38"
30"	38.75"	2.94"	33.75"	982	36.00"	28	1.38"
32"	41.75"	3.19"	36.00"	1238	38.50"	28	1.62"
34"	43.75"	3.25"	38.00"	1384	40.50"	32	1.62"
36"	46.00"	3.56"	40.25"	1676	42.75"	32	1.62"
38"	48.75"	3.44"	42.25"	1819	45.25"	32	1.62"
40"	50.75"	3.56"	44.25"	2040	47.25"	36	1.62"
42"	53.00"	3.81"	47.00"	2380	49.50"	36	1.62"
44"	55.25"	4.00"	49.00"	2715	51.75"	40	1.62"
46"	57.25"	4.06"	51.00"	2961	53.75"	40	1.62"
48"	59.50"	4.25"	53.50"	3350	56.00"	44	1.62"
50"	61.75"	4.38"	55.50"	3716	58.25"	44	1.88"
52"	64.00"	4.56"	57.50"	4156	60.50"	44	1.88"
54"	66.25"	4.75"	59.50"	4639	62.75"	44	1.88"
56"	68.75"	4.88"	62.00"	5130	65.00"	48	1.88"
58"	71.00"	5.06"	64.00"	5675	67.25"	48	1.88"
60"	73.00"	5.19"	66.00"	6155	69.25"	52	1.88"