


FLANGES

INDUSTRY STANDARD
CLASS 300 SERIES A SLIP-
ON BOLTING MATCHES

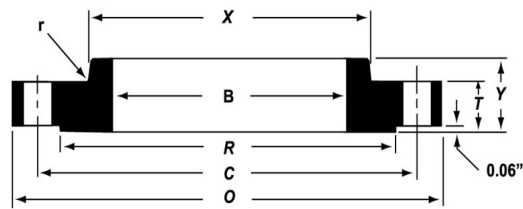

All dimensions are in inches.

These flanges will be supplied with a 1/16" raised face unless otherwise specified.

Flat face option available

Dimensions are supportive from industry terminology and are a non-committee specification.

These flanges are not covered by ASME B16.47 or API-605 specifications.

Nominal Pipe Size	Outside Diameter (O)	Thickness (T)	Raised Face Diameter (R)	Length Thru Hub (Y)	Hub Diameter (X)	Minimum Fillet Radius (r)	Flange Bore (B)	Approximate Weight (lbs)	Bolt Circle (C)	Number of Holes	Diameter of Holes
inch	inch	inch	inch	inch	inch	inch	inch	lbs	inch	count	inch
26"	38.25"	3.12"	29.50"	5.37"	30.25"	0.38"	26.25"	595	34.50"	28	1.75"
28"	40.75"	3.38"	31.50"	5.68"	32.75"	0.44"	28.25"	729	37.00"	28	1.75"
30"	43.00"	3.62"	33.75"	6.12"	34.75"	0.44"	30.25"	840	39.25"	28	1.88"
32"	45.25"	3.88"	36.00"	6.56"	36.75"	0.44"	32.25"	964	41.50"	28	2.00"
34"	47.50"	4.00"	38.00"	6.81"	38.75"	0.50"	34.25"	1076	43.50"	28	2.00"
36"	50.00"	4.12"	40.25"	7.06"	41.00"	0.50"	36.25"	1202	46.00"	32	2.12"
38"	46.00"	5.31"	40.50"	6.06"	39.00"	0.50"	38.25"	687	43.00"	32	1.62"
40"	48.75"	5.56"	42.75"	6.56"	41.25"	0.50"	40.25"	840	45.50"	32	1.75"
42"	50.75"	5.81"	44.75"	6.81"	43.25"	0.50"	42.25"	922	47.50"	32	1.75"
44"	53.25"	6.06"	47.00"	6.86"	45.25"	0.50"	44.25"	1055	49.75"	32	1.88"
46"	55.75"	6.31"	49.00"	7.06"	47.25"	0.50"	46.25"	1205	52.00"	28	2.00"
48"	57.75"	6.56"	51.25"	7.18"	49.25"	0.50"	48.25"	1306	54.00"	32	2.00"